

ENGINEERING
TOMORROW

Danfoss

Protect your system Hammer your costs

Solenoid, angle seat and thermostatic valves - a fluid control product overview

17 %

better water
hammer damping
than industry
standards

Three ways of efficiently controlling fluids



Solenoid valves

Solenoid valves are an easy way to control and regulate fluids and gasses. Our programme consists of direct-operated, servo-operated and assisted lift versions. Solenoid valves are the right choice when you have media with limited dirt content and small to high flow volume.

Our solenoid valve programme consists of two ranges:

- The compact A range
 - offering small physical dimensions for control of flow where space is limited.
- The high performance B range
 - a sturdy and universal broad programme for control of flow in industrial applications and within heating and sanitary systems.



Angle seat valves


Pneumatically activated angle seat valves are designed for specialised and demanding applications. These robust valves are the right choice for media with high dirt content, high viscosity, high ambient and media temperatures and large flow volumes. They are also suitable for humid environments, explosion hazard environments and for applications with low or unknown pressure conditions.



Thermostatic valves

Thermostatic self-acting valves are a simple and reliable way to control the temperature of water-cooled equipment. They do not require control air or electricity and they are insensitive to dirt and water pressure, making them a highly robust choice.

Benefit from outstanding features

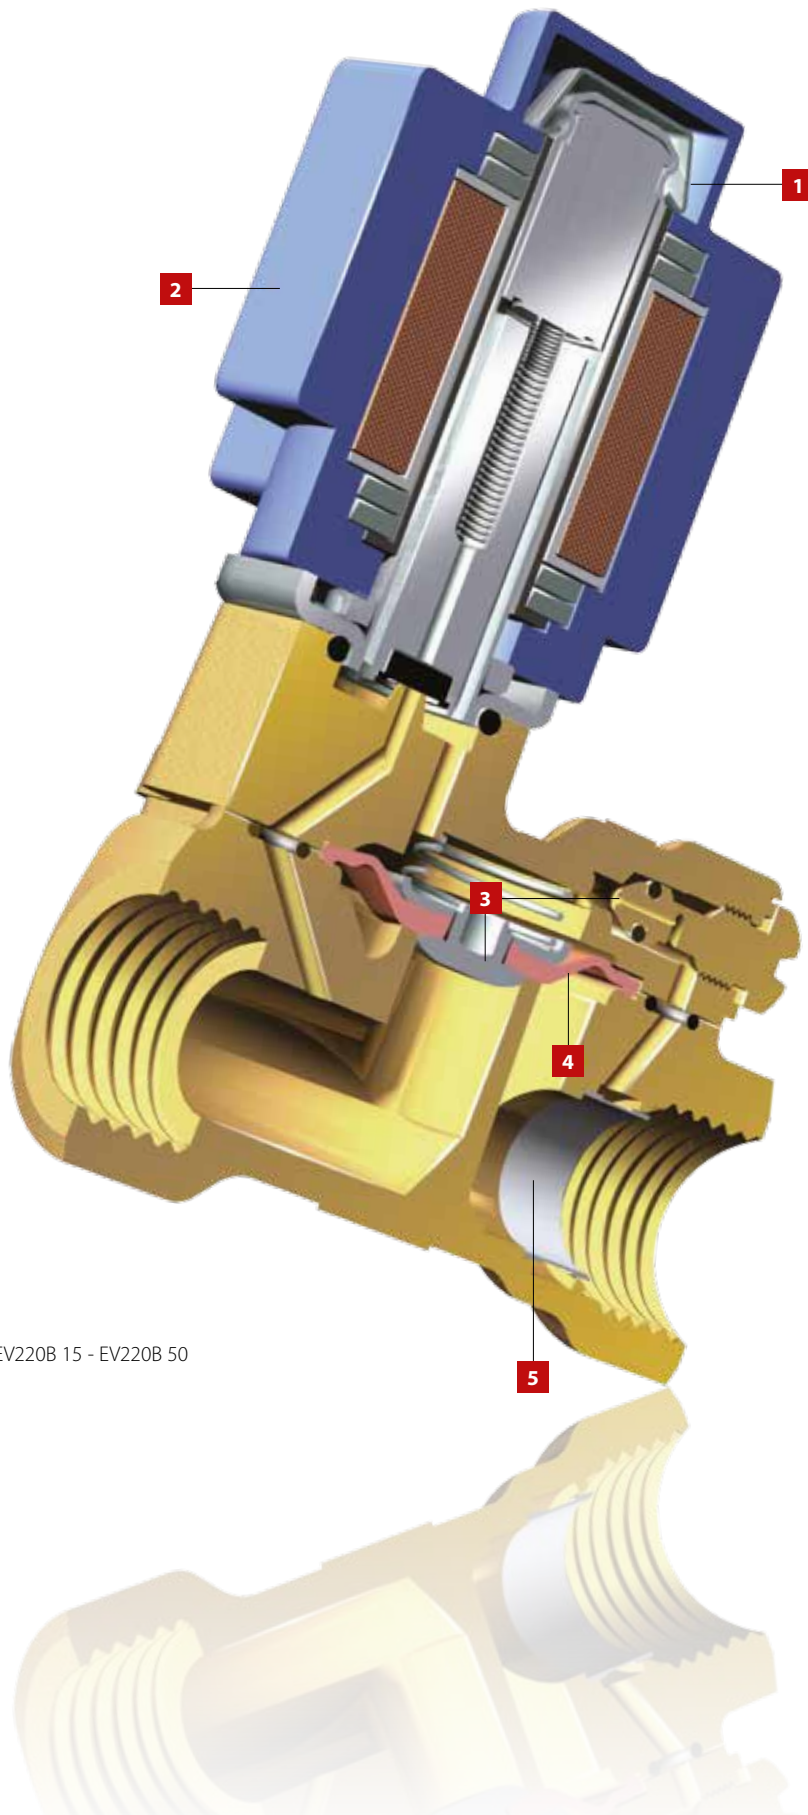

EV220B 15 - EV220B 50

1 Clip-on coil

The customer-friendly clip-on coil system ensures simple and safe assembly and disassembly without any tools. Furthermore, a hermetic seal against moisture penetration is available if required.

2 Coil range up to IP67

The coil range goes from IP00 to IP67, offering optimum solutions for a variety of applications.

3 Best water hammer damping

Controlled damping in the very late closing stage, an optimised shape of the diaphragm assembly and the equalizing orifice minimise water hammering in all Danfoss valves, down to 1.5 bar (acc. to EN 60730-2-8, 6 bar test pressure).

4 Long lifetime and high performance

The lifetime of the valve is significantly extended because of the specially shaped diaphragm that reduces the stress level of the rubber. This special shape also ensures optimal flow.

5 Insensitive to dirt

The coaxial filter, protecting the valve pilot, is self cleaning. If the equalizing orifice is blocked by dirt, it is easily cleaned.

Broad range

Danfoss valves are available in brass, DZR brass and stainless steel versions. The standard brass version is suitable for applications with limited risk of corrosion while the other two are ideal for more aggressive media.

Customised solutions

By working with Danfoss, you can get precisely the valve needed for your application. We can also modify our products to your specifications, giving you a valve optimised for your application. And where the specifications don't yet exist, we will help you define them – building quality into your product from the start.

Choose the right solution from our extensive range

Fluid control overview



Type	EV210B 2/2-way	EV310B 3/2-way	EV220B 6-22 2/2-way	EV220B 15-50 2/2-way	EV220B 65-100 2/2-way	EV222B 2/2-way	EV224B 2/2-way	EV225B 2/2-way	EV250B 2/2-way	EV260B 2-way proportional	EV210A 2/2-way	EV310A 3/2-way	EV220A 2/2-way	AV210	AVTA 2-way proportional	
Media																
Water																
Air and neutral gasses																
Oil																
Slightly aggressive media																
Aggressive media																
Steam																
Characteristics																
System suitability																
Connection	G 1/8 - G1	G 1/8 - G 3/8, flange 32 mm	G 1/4 - G 1	G 1/2 - G 2	Flange connections: 2.5, 3 and 4"	G 1/2 - G 2	G1/2 - G 1	G 1/4 - G 1	G 3/8 - G 1	G 1/4 - G 3/4	G 1/8 - G 1/4, flange 32 mm	G 1/8 - G 1/4, flange 32 mm	G 1/4 - G 2	G 3/8 - G 2	G 3/8 - G 1	
Function	NC or NO	NC or NO	NC or NO	NC or NO	NC	NC	NC or NO	NC	NC or NO	NC	NC or NO	NC or NO	NC or NO	NC or NO	Thermostatic	
Orifice size mm	1.5 - 25	1.5 - 3.5	6 - 22	15 - 50	65 - 100	15 - 50	15 - 25	6 - 25	10 - 22	6 - 20	1.2 - 3.5	1.2 - 2	6 - 50	15 - 50	10 - 25	
Pressure range, bar	0 - 30	0 - 20	0.1 - 30	0.3 - 16	0.25 - 10	0.3 - 10	0.3 - 40	0.2 - 10	0 - 10	0.5 - 10	0 - 30	0 - 20	0.2 - 16	0 - 16	0 - 10	
Medium temperature max.	140 °C	100 °C	100 °C	140 °C	90 °C	100 °C	60 °C	185 °C	140 °C	80 °C	120 °C	100 °C	100 °C	180 °C	130 °C	
Kv value m³/h	0.08 - 8	0.08 - 0.4	0.7 - 6	4 - 40	50 - 130	4 - 40	4 - 11	0.9 - 6	2.5 - 7	0.8 - 5	0.04 - 0.26	0.04 - 0.08	1 - 32	4.5 - 74	1.4 - 5.5	
Special features	Isolating diaphragm	Manual override option				Isolating diaphragm	High pressure	IP 65				Manual override option		Options: Manual override position indicator		
Approvals*	GL, WRAS, VA and DNV	GL	WRAS, VA and DNV	GL, WRAS, VA and DNV			GL		WRAS and VA			WRAS	WRAS and VA			
Material																
Valve body	Brass or stainless steel	Brass or stainless steel	Brass or DZR brass	Brass, DZR Brass or stainless steel	Cast iron	Stainless steel	Brass	DZR Brass	DZR Brass	Brass	Brass or stainless steel	Brass or stainless steel	Brass	Gun metal or stainless steel	Brass or stainless steel	
Internal	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Brass or stainless steel	
Seal material	EPDM or FKM	FKM	EPDM or FKM	EPDM, FKM or NBR	EPDM or NBR	FKM	NBR	PTFE and AFLAS	EPDM or FKM	FKM and PTFE	EPDM or FKM	FKM	EPDM, NBR or FKM	PFTE	EPDM or NBR	

* Only EPDM versions in Normally Closed (NC) valves are WRAS approved. GL = Germanischer Lloyd. WRAS = Water Regulations Advisory Scheme. VA = Water supply and drainage of ETA Denmark. DNV = Det Norske Veritas.

Engineering Tomorrow



Danfoss is a leading global player within the development and production of mechanical and electronic products and controls. Since 1933, our extensive know-how has made modern life easier and we continue to break new ground within our core business areas.

Every day, more than 250,000 items are produced at 70 factories in 25 countries. Impressive as these figures are, we are most proud of the way our dedicated employees apply the high-quality components in customer solutions, adding value to the end products. Building strong partnerships is of great importance to us, because it is purely by understanding our customers' needs that we can meet the expectations of tomorrow.

This is also true in Industrial Automation, a Danfoss entity dedicated to focusing on the industrial world of today. Through us, you gain access to the entire Danfoss pool of technologies, with special emphasis on sensors and controls.

We offer safer, more reliable and more efficient solutions in a close cooperation based on firm values.

Danfoss Limited - Industrial Automation

Capswood · Oxford Road, Denham · Bucks · UB9 4LH · United Kingdom · ia@danfoss.com · www.danfoss.com/United_Kingdom
Telephone: 0870 241 7030 · Fax: 0870 241 7035

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.